

Swapping Boxes in the Stand Up 1.5 [and earlier]



Scan for videos



1. Access the Service Panel

Tap the Nutrition Facts in the bottom left of the screen. Press and hold the X in the top right, until “Service Panel Loading” appears.




2. Open Machine Door

Use the key to open the machine door and locate the box to be replaced according to the Service Panel.




3. Locate Empty Flavor Box

Disconnect, remove plastic bag, and recycle the old box.



Twist connectors:
rotate counterclockwise, until disengaged. Slide off the connector.




Gray connectors:
push on tabs and pull until the connector fully disengages with two clicks.

4. Open New Flavor Box

Tear open the new flavor box at the perforation, pull off the cap, and expose the flavor nozzle.

DO NOT pull the bag fully out of the box!

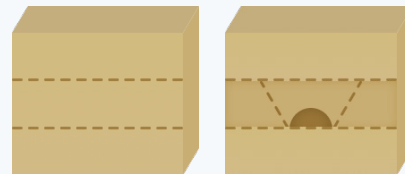


5. Insert New Flavor Box

Place new flavor box in the empty slot and reconnect. Make sure BIB connector is pointed down.



6. Restock Flavor in Service Panel

Tap the new flavor’s “Restock” button and complete the fields to ensure proper tracking of expiration dates and inventory. Check “double boxes” is using double BIB kit.

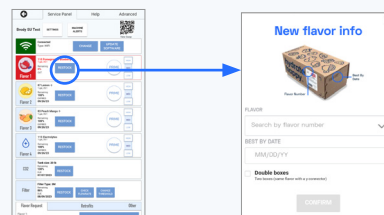

7. Prime Flavor Line

Place a container under the dispense area. Press and hold Prime button for 15 seconds to flush the new flavor through each flavor line.

