

bevi. Install Wizard Overview and what to expect.

This document is intended to give you an idea of what to expect on your first Bevi Standup 2.0 Installation

1. First transport your Bevi to the location it is to be unboxed and installed. Please note the dimensions and moving requirements below:



Bevi 2.0 weighs 240lbs -280lbs, unpackaged and packaged respectively.

The center of gravity of the unit is considerably higher than that of Bevi 1.5 therefore posing a tip hazard. It requires two people to safely remove it from its shipping packaging.

An appliance dolly is needed to safely move it to its final install destination.



NOTE: The casters on Bevi 2.0 are NOT intended to transport the unit or move more than a few feet. For safety reasons the unboxing and installation instructions must be followed exactly.

2. After unboxing your Bevi at the location it is to be installed, look for the power cord and the installation instructions taped to the back of the machine.

Things you need to complete the installation:


- 8 Flavor or Enhancement BIBs
- WiFi name to join at customer site
- Wifi Password
- 3M Filter (Not included in the Bevi)
- CO2

3. Reviewing the initial Steps of the Installation Process:

- Plug in the bevi to a 115V GFCI outlet. (no extension) Bevi Power Cord is 10ft
- Turn on the Bevi using the Power button next to the plug.



- Let the machine initialize. The Install Wizard will automatically start

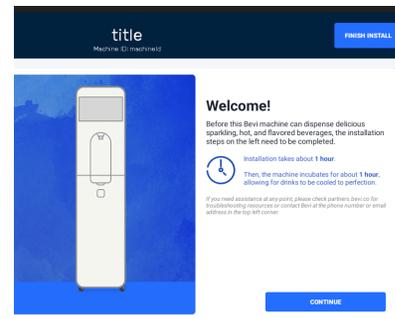

4. Connect the Machine to WiFi to download the most recent software version.

NOTE: you will need a 2.4GHz network to be able to connect to WIFI - this is the best option. If needed use ethernet or cellular options.

Once completed, follow the wizard the rest of the way through the remaining 12 steps to complete installation.

INSTALLATION STEPS

Connect to Ethernet or Wifi

Download updates

Confirm registration

Energy Saver Mode

Checklist

Accessories

Add filter

Add CO₂ tank

Connect water source and fill

Add flavors and enhancements

Flush filter

Purge sparkling water

Incubation

Things to double check during your install

- Make sure Inlet water is turned on when prompted.
- Make sure the Buffer Tank Valve is in the "On" Position (In line with.



2. Ensure that the Hot Water Line is not kinked or has the propensity to kink by checking to see if the yellow mesh is in place, and that the line moves freely when shutting.



3.) Dispense each flavor, check the quality of the water

- If cloudy you may want to further flush the filter

4. Taste each flavor for dispense quality

- You may need to prime a flavor using the Troubleshooting Tools if you can't taste each flavor

5. Make sure you show your business sponsor how to use the Bevi.

If you have any questions please reach out to support@bevi.co

