

Replacing the CO₂ Tank in a Countertop Bevi

CO₂ tank changes must be logged in the Service Panel on the Bevi touchscreen to ensure proper inventory tracking.

1. Access the Service Panel

Select **Ingredients** at the bottom of the touchscreen.



Select **any flavor** or **Pure Water**.




Select & hold upper right **X**, until you see **Service Panel Loading**

2. Start Service

Select the **Start Service** button at the upper right-hand corner.



If CO₂ needs to be restocked, it will be **highlighted in red**.

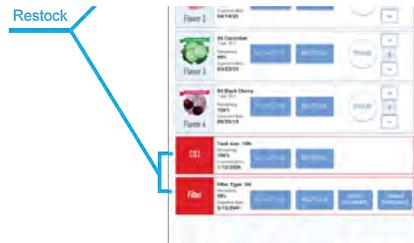

If the flavor does not require an update, select **No Action**.

3. Open the bottom cabinet doors

Locate old CO₂ Tank to be replaced



4. Detach and shut off the tank

Detach the nylon strap holding the tank in place.



Shut off the tank by turning the tank knob **clockwise** until it stops turning.



5. Disconnect the hose and remove the tank

Using an adjustable wrench, **disconnect the hose connector** by turning the nut **counterclockwise**.



Remove the old CO₂ tank from the Bevi unit.

6. Connect the new tank

With the **nylon washer** between the hose and the new tank, hand tight hose connector onto the tank.



Then, **tighten the hose connector** with an adjustable wrench in a clockwise fashion, following Step 5 but in reverse.

7. Reopen the tank and reattach the nylon strap

by following Step 4 but in reverse.

For v1.5 Standup units, the pressure setting is preset, so no further pressure regulator adjustment is needed.

For other units, ensure the pressure on the top gauge reads about 87 psi / 6 bar.




8. Update Service Panel and End Service

Select the **Restock** button for new CO₂.



Select the **size** of the new CO₂ tank that was installed.



Select **End Service**. Close and lock the unit with the key provided.

